



## CVW402 4-cable: Covert Multiband MIMO Antenna

- 4-cables: two for Global Cellular/LTE, one for WiFi, and one for GPS
- Covers all Cellular & LTE frequencies worldwide, from 694 MHz to 2750 MHz
- WiFi elements can be used for WiFi MIMO or for separate WiFi modems

Mobile Mark's Covert CVW402 Series Multiband MIMO antenna contains four separate antennas, all in one compact antenna housing: two broadband LTE/Cellular antennas, one dual-band WiFi antennas, and one GPS antenna.


With 4-elements, the new CVW402 antenna is ideal for fleet management systems that combine GPS with both any Global LTE MIMO modem as well as WiFi MIMO modem.

The CVW402 is very compact, measuring only 2" x 7" x .75" (5.1cm x 17.8cm x 1.9cm). The antenna is encased in a solid radome made from ASA Plastic. It is Groundplane independent and can be mounted on or inside of a fiberglass box.

This antenna is ideal for private vehicles where discretion is required. It has high speed data transfer capabilities with MIMO on both Cellular/LTE and WiFi.

The CVW402 can be configured for dual GPS/Glonass by adding "G" to the series, e.g. CVW402G.

### Model Configurator

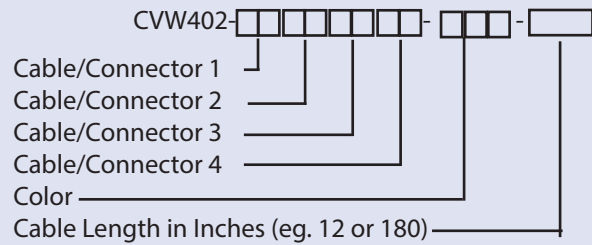

Example: CVW502-2C2C2J2J2C-BLK-180

Specify "CVWG" instead of "CVW" for GPS/Glonass combination antenna.

Cable Options:		Connector Options:		Color Options:	
Code	Cable	Code	Connector	Code	Color
2	RG-174	A	TNC	BLK	BLACK

(Other Configurations available.)

### Specifications

Frequency & Gain (peak)*:		Radome Material:	ASA UV-Stable Plastic
Cable 1 & 2 (Global LTE)	694-960 MHz, 3 dBi & 1710-2750 MHz, 4 dBi	Operating Temperature:	-40° to +80° C
Cable 3 (WiFi)	2.4-2.5 & 4.9-6.0 GHz, 5 dBi	Connectors:	SMA Plugs standard
Cable 4 (GPS)	1575.42 +/- 2 MHz, 26 dB, 5 dBi	Cable:	
Optional GPS & Glonass	1575 MHz & 1612 MHz	Cable 1-5	Separate RG-174, 10 ft (3m)
VSWR*:	2:1 VSWR over Range	Mounting:	Tape mounting
Impedance:	50 Ohm Nominal	Shock and Vibration:	IEEE1478, EN61373
Maximum Power:	10 Watts	Water Ingress:	IP67
Case size:	7" long x 2" wide x 3/4" tall (17.8cm x 5.1cm x 1.9cm)		
			*Measured on 1' ground with 1' cable
			Specifications subject to change without notice (4/2016)